



ALL FOR SHOPS AND WAREHOUSES

VVN

Wheel loaders

Easy maintenance & outstanding after-sales services
Complete line of applications and accessories
Pilot control system, automatic leveling



Models described in the catalog:


VVN WL 42	VVN WL2 42	VVN WL 43	VVN WL 55	VVN WL 56
VVN WL 65	VVN WL 100	VVN WL 111	VVN WL2 111	VVN WL3 111
VVN WL4 111	VVN WL 112	VVN WL 113	VVN WL 115	VVN WL 116
VVN WL 117	VVN WL2 117	VVN WL3 117	VVN WL4 117	VVN WL5 117
VVN WL6 117	VVN WL 118	VVN WL 200	VVN WL 201	VVN WL2 201

VVV WL3 111

overall specifications

DIMENSIONS

All dimensions are approximate. Dimensions may vary with bucket and tire choice. Refer to operating specifications.

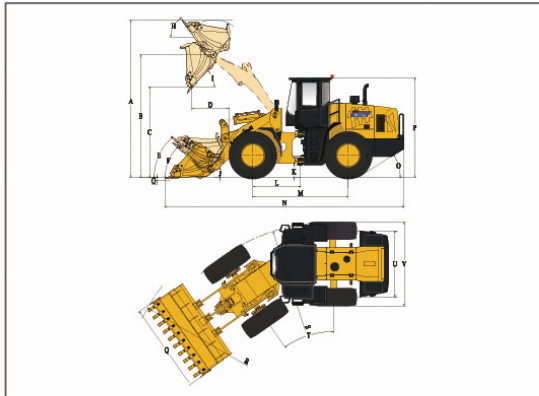

NO.	DESCRIPTION	UNIT	DIMENSIONS
A	Overall Height – Bucket Raised	mm	4790
B	Bucket Pin Height at Max. Lift	mm	3710
C	Dump Clearance at Max. Lift (45°)	mm	2806
D	Reach at Max. Lift and 45° Dump	mm	1170
E	Rack Back Angle at Carry	°	47
F	Rack Back Angle at Ground	°	44
G	Digging Depth	mm	30-40
H	Rack Back Angle at Max. Lift	°	55
I	Dump Angle at Max. Lift	°	45
J	Carry Height	mm	400
K	Ground Clearance	mm	347
L	Center Line of Front Axle to Hitch	mm	1425
M	Wheel Base	mm	2850
N	Overall Length	mm	7520
O	Departure Angle	°	27
P	Height to Top of Cab	mm	3180
Q	Overall Width over Bucket	mm	2500
R	Min. Turning Radius over Bucket	mm	6240
S	Min. Turning Radius over Tires	mm	5680
T	Steering Angle – Left/Right	°	35
U	Width at Tread Center	mm	1850
V	Overall Width over Tires	mm	2320

OVERALL DATA

Bucket Capacity	1.8m³
Rated Payload	3500kg
Operating Weight	11620±300kg
Traction Force	106±3kN
Breakout Force	103±3kN
LxWxH	7520x2500x3180mm

ENGINE&ELECTRICAL SYSTEM

Maker/Model	DF CUMMINS/6BTA5.9-C130
Emission Standard	EPA (Tier II)/EU Stage II
Engine Type	4 Stroke, Turbocharged & Charge Air Cooled, Direct Injection, Diesel Engine
Rated Power	97kW(130hp)/2200rpm
Maximum Torque	580N·m/1400rpm
Bore x Stroke (mm)	102x120
No. of Cylinders/Displacement	6/5.9L
Compression Ratio	17.3
Air Cleaner	Dry, Double Elements
Alternator	45Amp
Battery	2-24V/105Ah
Starting Motor	24V/6kW
Heating Capacity (W)	5000W
Cooling Capacity (W)	4700W

DRIVE TRAIN

Transmission Type	Countershaft Powershift Transmission				
Shift Type	Electronic Powershift Control				
Pressure of Transmission	1.1-1.5MPa				
Torque Converter Type	Single-stage, Single-turbine, 3-element				
Torque Ratio	3.2				
Axes	Rigid Front Axle&Oscillating Rear Axle				
Rear Axle Oscillation (°)	±10°				
Differential	Conventional				
Main Reducer	Spiral Bevel, 1-stage Reduction				
Final Reducer	Planetary Reduction				
Tire	17.5-25 L-3 12PR TT				
Travel Speeds	km/h	1st	2nd	3rd	4th
	Forward	6.5	12.0	32.0	
	Reverse	6.8	12.5	33.5	

BRAKE SYSTEM

Service Brake	Single Circuit Caliper, Dry Brake
Setting Pressure	0.70-0.78MPa
Parking Brake	Flexible Shaft Controlled Caliper Brake
Emergency Brake	Flexible Shaft Controlled Caliper Brake

STEERING SYSTEM

Type	Hydraulic Load Sensing System	
Pump	Gear Pump, 246L/min • 2200rpm	
System Pressure	14MPa	
Cylinder	Type	Double Acting
	Bore x Stroke	2-80x315mm
Steering Angle	±35°	

HYDRAULIC SYSTEM

Type	Single-lever(Joystick) Control			
Pump	Gear Pump, 246L/min • 2200rpm			
Control Valve	2 Spool (Bucket&Boom)			
System Pressure	16MPa			
Cylinder	Lift Cylinder	2-125x784mm		
	Tilt Cylinder	1-140x553mm		
Joystick Control Pressure	2.5MPa			
Cycle Time (Sec)	Raise	Dump	Lower	Total
	5.5	1.3	3.7	10.5

SERVICE REFILL CAPACITY

Fuel Tank (L)	200L
Hydraulic Tank (L)	173/178, (3 rd Spool for Auxiliary Function)L
Crankshaft (L)	17L
Transmission (L)	37L
Front Axle/Rear Axle (L)	18.5L/18.5L

STANDARD EQUIPMENT

DF CUMMINS Engine	Single-lever(Joystick) Control
LONGKING Transmission	Standard Lift&Bucket (1.8m³)
Electronic Powershift Control	ROPS&FOPS Cabin
LONGKING Axles	Air Conditioner
Flexible Shaft Controlled Caliper Brake(Parking Brake)	Radio&MP3 LCD Display

OPTIONAL EQUIPMENT

Cold Starting (-35°C)	Quick-change Bucket (1.7m³)
Oil-bath Air Filter	Bucket 1(2.0m³)
17.5R25 ★★ L-3 TL	Enlarged Bucket(2.3m³)
3 rd Spool for Auxiliary Function	Coal Bucket(2.5m³)
Double-lever(Joystick) Control for Lift&Tilt&Auxiliary Function	3 Piece Cutting Edge, Bolt-on Type Bucket
Sliding Cabin Window	Log Fork
Electric Heating Rear Window	Grasping Pitchfork
Lockable Oil Tank Cap	Side Dump Bucket
Rear View Camera	Fork(Quick-change Only)
Pressure Testing Connector	4in1 Bucket(Quick-change Only)
High Lift &Additional Counterweight	Snow Blade(Quick-change Only)
Quick-change Coupler	



ALL FOR SHOPS AND WAREHOUSES

LATVIA

SIA "Viss Veikaliem un Noliktavam"
41A - 224 Kan davas street, Riga, LV-10 83
Phone: +371 27727449 (latvian, english),
+371 22074120 (l atvian, russian, english),
+371 20330002 (latvian, russian, english)
E-mail: info@vvn.lv

www.vvn.lv

LITHUANIA

Phone: +370 70066080
E-mail: info@vvn.lt
www.vvn.lt

NORWAY

Phone: +47 219558 68
E-mail: info@vngroup.no
www.vngroup.no

ESTONIA

Phone: +372 634633 2,
+372 63463 42
E-mail: info@vvn.ee
www.vvn.ee

DENMARK

E-mail: info@vngroup.dk
www.vngroup.dk

FINLAND

Phone: +358 7532633 23
E-mail: info@vvn.fi
www.vvn.fi

RUSSIA

Phone: +7 849960925 1 5
E-mail: info@vngroup.ru
www.vngroup.ru

SWEDEN

Phone: +46 107502388
E-mail: info@vngroup.se
www.vngroup.se

BELARUS

Phone: +375 849960925 1 5
E-mail: info@vngroup.by
www.vngroup.by